

Since 1898  
**CONSEW**®

# MODELS 754R-3/756R-3 (MODELS 754R /756R)


WITH  
 LARGE OSCILLATING SHUTTLE HOOK  
 EXTRA LONG ARM – 16½" (420mm)  
 REVERSE FEED  
 BUILT-IN BOBBIN WINDER  
 CAM TAKE-UP LEVER  
 HEAVY BALANCE WHEEL  
 EXTRA HIGH FOOT LIFT – 13/16" (20mm)

**754R-3** LOWER & NEEDLE FEED,  
 REVERSE FEED

**756R-3** LOWER, NEEDLE & UPPER FEED  
 REVERSE FEED



Model 756R-3  
 COMPOUND FEED  
 NEEDLE FEED  
 ALTERNATING  
 PRESSER FEET  
 DROP FEED

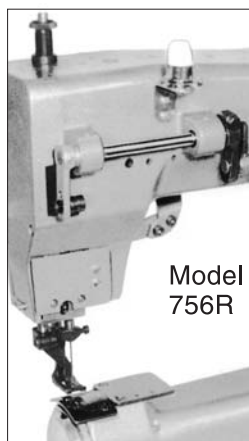

EXTRA HEAVY DUTY  
 SINGLE NEEDLE  
 LOCKSTITCH MACHINE  
 LONG CYLINDER ARM (16½")

CYLINDER ARM

## Models 754R-3 / 756R-3 (Models 754R / 756R)

### APPLICATIONS

- Suitable for sewing heavyweight materials such as canvas, vinyl, leather, synthetics and various coated, laminated and rubberized fabrics.
- Appropriate for use in upholstery, footwear, leather, canvas industries
- Designed for stitching such products as tents, sails, harnesses, tarpaulins, safety belts, parachutes, balloons, industrial bags, boots, book binding, auto, boat and furniture upholstery, sports and camping equipment, orthopedic appliances, suitcases, luggage, ski boots, knapsacks, footwear and outerwear made of extra heavy duty materials
- Recommended for sewing tubular and curved work
- Designed for extra thick thread

### FEATURES

- Large oscillating shuttle hook
- Extra long arm - 16½" (420mm) for R-3 version (**15¾" -400mm for R version**)
- Reverse feed
- Built-in bobbin winder
- Cam take-up lever
- Extra high presser lift for sewing extra heavy materials
- Heavy balance wheel
- A cloth plate for flat work available as optional equipment for all models
- Triple Transport: bottom, top and needle feed (walking foot)

### SPECIFICATIONS

Models	Sewing Speed s.p.m.*	Presser Lift		Needle Bar Stroke		Stitch Length		Needle	Cylinder Arm Diameter min.		Working Space	
		mm	inches	mm	inches	mm	s.p.i.		mm	inches	mm	inches
754R-3	800	20mm	13/16"	56	2 13/64"	10	2 1/2	7 x 3	81	3 3/16"	420	16 1/2"
756R-3	800	20mm	13/16"	56	2 13/64"	10	2 1/2	7 x 3	81	3 3/16"	420	16 1/2"
754R	1200	25.4"	1"	56	2 13/64"	10	2 1/2	7 x 3	84	3 9/32"	400	15 3/4"
756R	1200	25.4"	1"	56	2 13/64"	10	2 1/2	7 x 3	84	3 9/32"	400	15 3/4"

\* Speed depends on operation, materials and thread