


Flat Bed Extra Heavy Duty Compound Feed Lockstitcher



Max Sewing Speed	800 r.p.m.
Stitch length	0- 15 mm
Needle bar stroke	56 mm
Thread take-up lever stroke	96 mm
Pressure foot lift	By hand/knee 13 / 20 mm
Needle size	DY x 3 26#
Shuttle hook	KSP-204N
Lubrication	Manual
Motor	550 W Clutch 1400 r.p.m.

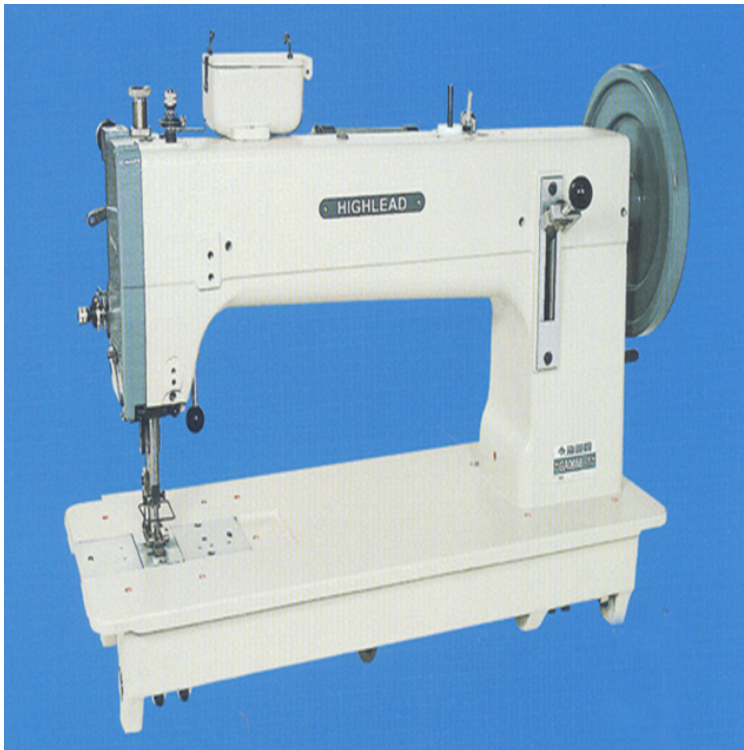

This machine series is a new product series of Highlead brand post bed two needle lockstitch sewing machine series, which is designed with post bed, compound feeding mechanism and split needle bar mechanism. The two needles can be engaged or disengaged for convenient corner stitching and clear stitches, especially available for stitching on surfaces with radius. With compound feeding mechanism, it is available for stitching multi-layer material of heavy weight, such as leather, foam plastic, synthetic fabric, etc and can avoid any displacement. It is a high class equipment for stitching car seats, fabric decorations in cars, shoe uppers of leather or synthetic leather, sports apparatus, office furniture, soft cushion, trunk, bag, etc.

GC24628-1 Twin-needle post bed compound feed split needle bar lockstitch sewing machine

GC24628-25 Long arm two needle post bed compound feed spit needle bar lockstitch sewing machine

